

Data sheet

Flussonic Bullet v3

6 MP IP camera

Erlyvideo Ltd.
watcher.flussonic.ru

flussonic



About the camera

This 6-megapixel outdoor IP camera features a cylindrical housing and captures HD footage at 6MP resolution (3072 x 2048). The V3 model offers advanced detection capabilities, including person and vehicle detection.

The high-quality Sony Starvis IMX335 sensor delivers sharp, clear images with exceptional low-light performance down to 0.01 Lux. The camera is equipped with 18 SMD Array IR LEDs providing illumination up to 20-30 meters, and includes a built-in microphone for audio recording.



ATTENTION!
Please read this document carefully before using the product.

Electrical Safety



RISK OF ELECTRICAL SHOCK.

Inside the camera housing there are uninsulated electrical circuits that can be dangerous to humans. To reduce the risk of electric shock, never disassemble the device. **ATTENTION:** Repairs and maintenance of the product must only be carried out by qualified technicians.

- To avoid electric shock and loss of warranty, **do not disassemble the device.**
- **Do not expose** the device to strong shock or vibration.
- **Do not use** power supplies that differ in specifications from those required by the camera.
- **Do not overload** electrical networks with consumers, as this can lead to fire and electric shock.
- The installation of this device must comply with **all safety requirements.**
- **Do not use** optional equipment that is not supported or recommended by the manufacturer.
- Route the cables in such a way that they are **protected from all kinds of damage and the elements.**
- The specifications and design of this product are subject to change **without prior notice from the manufacturer.**
- This device is **not for home use.**

Included in the box



1 IP Camera


1 pc



Mounting kit

1 pc

Dimensions and Specifications

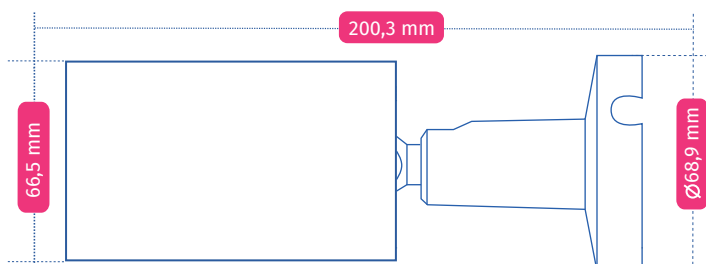

Specifications

Camera	
Sensor	Sony Starvis IMX335
Min. illumination	0.01Lux@F1.2(AGC ON), 0 Lux IR on
Shutter time	1/25s ~ 1/100000s
Lens	3.6mm Fixed lens
Day-Night Vision	Auto/Color/(B/W)/Timing
Image	
Max. image resolution	3072(H)×2048 (V)
WDR	Digital WDR
AGC/BLC/HLC	Support
Compression	
Video compression	H.264/H.265
Bitrate	64Kbps ~ 8Mbps, VBR/CBR
Audio compression	G.711-u/G.711-a/AAC
Network	
IP address assignment	DHCP
Protocol	HTTP(S)/RTSP/RTMP/FTP/NFS/SNMP/DHCP/NTP, etc.
Interface	
Ethernet	1 ~ 10/100Mbps Ethernet port

General	
Temperature	-30 C-(+60) C
Humidity	10%-90% RH
Power supply	12 VDC ± 10%
IR range	18 pcs SMD IR Leds
Consumption	< 5 W
Material	Metal
Ingress Protection	IP67
Weight	0.60kg/pcs
Box Dimension	215x98x98mm

How to connect the camera to Flussonic Watcher


- 1 **Get the server ID** from your operator who uses Flussonic Watcher.
- 2 **Download the Flussonic Watcher mobile app** from the Apple Store or Google Market.
- 3 **Log in** to the mobile app.
- 4 Connect your cell phone to the same local network where the **camera is activated**.
- 5 Select **"Add camera -> Search for devices"** in the menu of the mobile app.
- 6 Wait for **the automatic search** to complete.
- 7 In the list of available cameras for activation, select the one you want **to add to your account**.
- 8 **Fill out the form**, specifying the Organization where the camera will be added and the preset for it.
- 9 **The camera will appear in your mobile app.**
For more information on connecting cameras, visit watcher.flussonic.com

Mobile application

You can download the Flussonic Watcher mobile app here:



Mobile and web application Flussonic Watcher

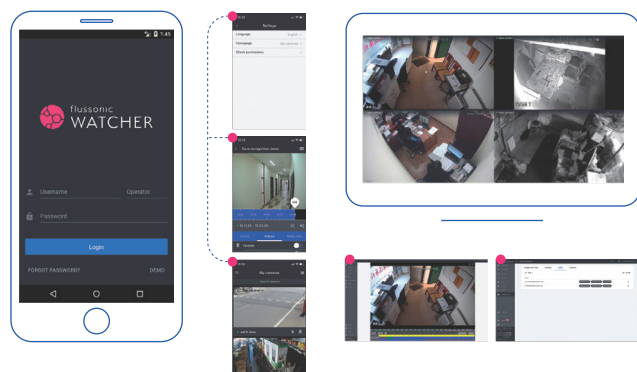

Sale mark

● Distributor	● Date of sale	● Flussonic Dome IP Video Camera
		SN
● Production date of the batch	● Dealer stamp	

Information on warranty obligations can be found on the dealer's website or at watcher.flussonic.com

Manufacturer:

Erlyvideo Ltd.
Moscow, Skolkovo Innovation Center, 7 Nobel St., 2nd floor, room 48,
workplace 2. Tel: +7 (495) 481-37-63

Certification details:

Request a copy of the certificate of conformity from the seller

Warranty period: 12 months
from the date of sale

Contacts:

watcher.flussonic.com
Email: support@flussonic.com
+1 (778) 716-2080

